


LUSTERKLEMMEN  
VOOR HARDE EN ZACHTE KABEL  
POLYPROPYLENE (Wit en Zwart)

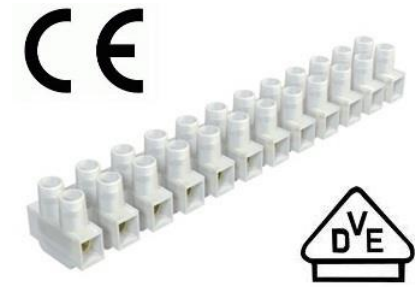

# TERMINAL BLOCKS POLYPROPYLENE

<b>MATERIAL:</b>	PP (polypropylene)
<b>INSERT:</b>	Brass
<b>SCREWS:</b>	Galvanized Iron
<b>MIN. OPERATING TEMP:</b>	-30°C
<b>MAX. OPERATING TEMP:</b>	90°C
<b>QUALITY ASSURANCE:</b>	CE/96/EC
<b>APPLICABLE STANDARD:</b>	EN60998-1: 2004 & EN60988-2-1: 2004

- Flame retardant
- Low transparency and rigidity
- Good bounce Impact force
- Available in black and white

